

# DUPLEX 1500 to 9000

## MultiEco-N Rooftop

### All-purpose ventilation units with counterflow heat exchangers

DUPLEX 1500–9000 MultiEco-N is a new generation of all-purpose ventilation units with counterflow heat recovery exchangers.

The rooftop version of DUPLEX 1500–9000 MultiEco-N compact units are used for comfort ventilation, hot-air heating and cooling in small facilities, shop floors, stores, schools, restaurants, shops, sports and industrial halls.

They are suitable wherever efficient ventilation and possibly hot-air circulation ventilation and cooling must be provided at minimum running cost, i.e. the highest efficiency of heat recovery, low power input of fans and as little noise as possible.

DUPLEX MultiEco-N units are produced in compact (1500 to 6500 MultiEco-N) and semi-compact (7500 to 9000 MultiEco-N) version and contain two independently controlled EC fans with backward curved blades, a heat recovery exchanger with large heat-transfer surface and high efficiency, slide-out supply and exhaust air class Coarse 60 % (G4), ePM10 50 % (M5) or ePM1 55 % (F7) filters, drain pans and possibly also an a circulation damper with a servo drive or integrated air heaters and coolers.

Unit casing is divided into two versions:

DUPLEX 1500–6500 MultiEco-N are frameless construction, casing is made of painted metal sheet (colour RAL 9007) with 30 mm PIR insulation with heat transfer coefficient ( $\lambda = 0,024 \text{ W/mK}$ ).

DUPLEX 7500–9000 MultiEco-N are frame construction, casing is made of painted metal sheet (colour RAL 9007) with 45 mm mineral wool insulation with heat transfer coefficient ( $\lambda = 0,037 \text{ W/mK}$ ).

#### DUPLEX MultiEco-N ventilation units meet the requirements of the most stringent European standards:

- Casing properties according to EN 1886
- EC motors according to ErP 2015
- SFP < 0,45 W/(m<sup>3</sup>/h) according to PassivHaus\*
- Hygienic requests according to VDI 6022
- Commission regulation (EU) requirements No. 1253/2014 (Ecodesign)



#### Advantages of DUPLEX MultiEco-N units:

- New design of ventilation units with excellent parameters
- Great thermal insulation of the casing (class T2)
- Reduced thermal bridging (class TB2)
- Filter side changing
- Elegant and efficient connections through the roof
- Compact dimensions
- Ease of installation
- Variable configuration of discharge ports
- Unified dimensions of ports
- Optional versions with a bypass and circulation damper
- High efficiency fans – SFP < 0,45 W/(m<sup>3</sup>/h)\*
- High heat recovery efficiency of the counterflow heat exchanger – up to 93 %
- Recessed junction box
- Integrated control system including temperature sensors
- Integrated web server (aMotion regulation)
- Comprehensive design software
- Insulated duct extensions as an option

1500 to 9000 MultiEco-N


\*in the defined working area




#### AVAILABLE MODIFICATIONS (CAN BE COMBINED)

- |     |                                  |       |                                   |
|-----|----------------------------------|-------|-----------------------------------|
| - B | with built-in bypass damper      | - PT  | with built-in preheater           |
| - C | with built-in circulation damper | - CHF | with built-in direct chiller      |
| - E | with built-in electrical heater  | - CHW | with built-in water-based chiller |
| - T | with built-in hot-water heater   |       |                                   |


#### OPERATING MODES OF DUPLEX MULTIECO-N UNITS

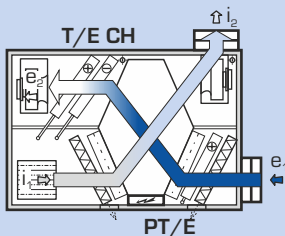

Ventilation with heat recovery with heating, cooling and preheating

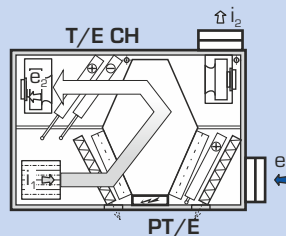

Circulation heating or cooling

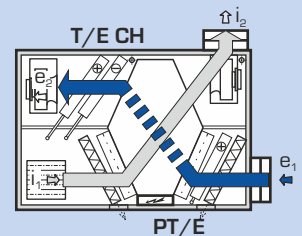

Ventilation without heat recovery (via bypass)

- |                  |                               |                  |                         |         |  |
|------------------|-------------------------------|------------------|-------------------------|---------|--|
| ➔ e <sub>1</sub> | ... Fresh outdoor air suction | ➔ i <sub>1</sub> | ... Exhaust air suction | T, PT/É | ... Central heating / electrical heater connection |
| ➔ e <sub>2</sub> | ... Fresh filtered air outlet | ➔ i <sub>2</sub> | ... Exhaust air outlet  | CH      | ... Cooling connection                             |

#### SELECTION SOFTWARE



For the detailed design of DUPLEX series units, accessories and control systems we recommend using our dedicated design software. You can find it on our website at [www.atrea.com](http://www.atrea.com) or request a CD at our office.



UNIT VENTILATORS & HEAT RECOVERY

ATREA s.r.o., Čs. armády 32  
466 05 Jablonec n. N.  
Czech Republic



Phone: +420 483 368 111  
Fax: +420 483 368 112  
E-mail: [export@atrea.com](mailto:export@atrea.com)

[www.atrea.com](http://www.atrea.com)

# PERFORMANCE GRAPHS

## DUPLEX MULTIECO-N

DUPLEX MultiEco-N		1500	2500	3500	4500	5500	6500	7500	9000
Supply air - max. <sup>1)</sup>	m <sup>3</sup> h <sup>-1</sup>	2 500	3 600	4 700	5 900	7 600	7 800	8 600	11 500
Extraction air - max. <sup>1)</sup>	m <sup>3</sup> h <sup>-1</sup>	2 300	3 650	4 600	5 750	7 650	7 900	8 300	11 300
Max. airflow according to ErP 2018 <sup>5)</sup>	m <sup>3</sup> h <sup>-1</sup>	1 950	2 900	3 200	4 550	5 350	5 750	7 100	8 000
Heat recovery efficiency <sup>2)</sup>	%	up to 93 %							
Number of versions and positions	-	see table „Mounting positions“, page 4							
Weight <sup>3)</sup>	kg	290-350	350-420	405-480	460-560	520-630	630-750	1 170-1 310	1 260-1 400
Max. power input	kW	1,5	2,5	4,4	4,4	6,5	6,5	6,6	8,9
Voltage	V	230	400	400	400	400	400	400	400
Frequency	Hz	50							
Revolutions	min <sup>-1</sup>	2 920	3 000	2 980	2 980	2 700	2 700	2 700	2 570
Heating output E low - max. <sup>5)</sup>	kW	2,1	4,2	7,2	7,2	9,9	9,9	-	-
Heating output E high - max. <sup>5)</sup>	kW	4,2	8,4	10,8	12,6	14,7	14,7	-	-
Heating output T - max. <sup>4)</sup>	kW	18	27	36	46	67	75	85	90
Cooling output CHW - max. <sup>4)</sup>	kW	9	12	22	30	39	46	67	72
Cooling output CHF - max. <sup>4)</sup>	kW	10	13	25	37	41	50	55	60

<sup>1)</sup> Maximum flow rate through units at zero external pressure


<sup>2)</sup> According to air volume

<sup>3)</sup> Depending on equipment


<sup>4)</sup> Depending on register type, liquid and flow rates

<sup>5)</sup> For detailed information please use our DUPLEX selection software.


## PERFORMANCE SUMMARY

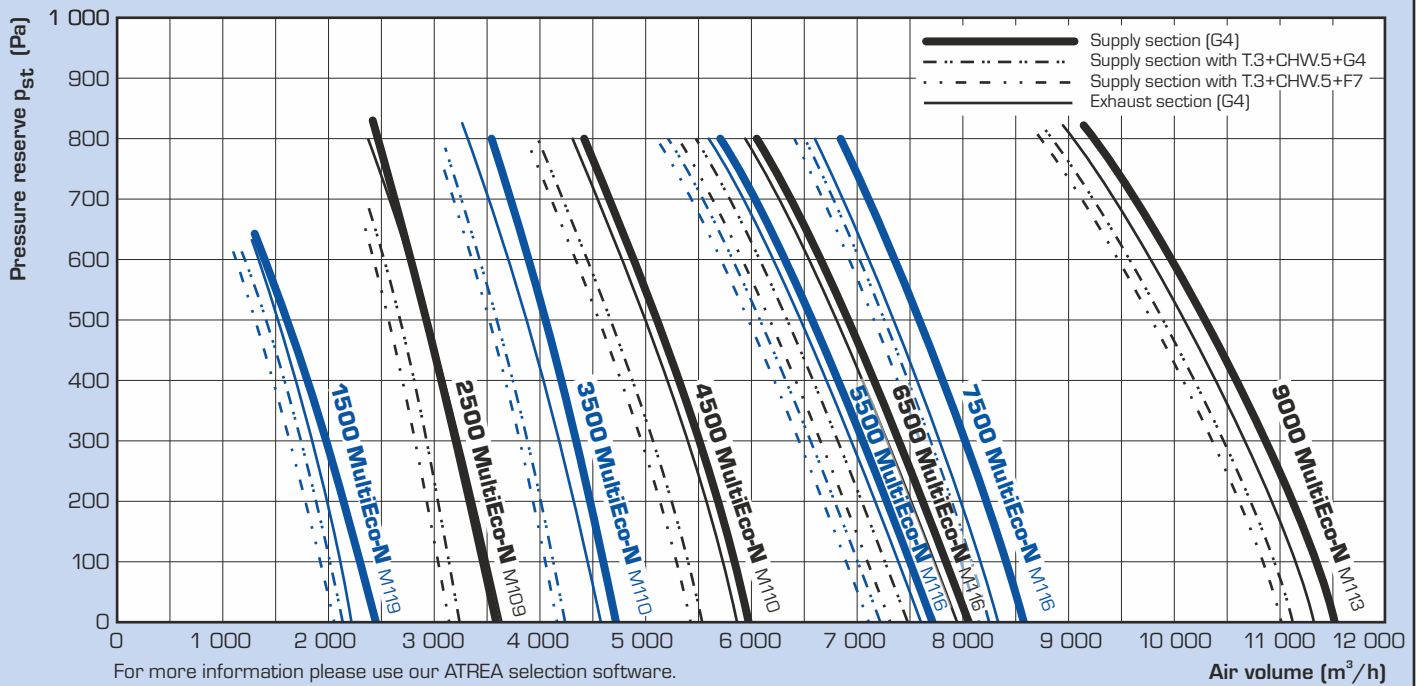

## HEAT RECOVERY EFFICIENCY

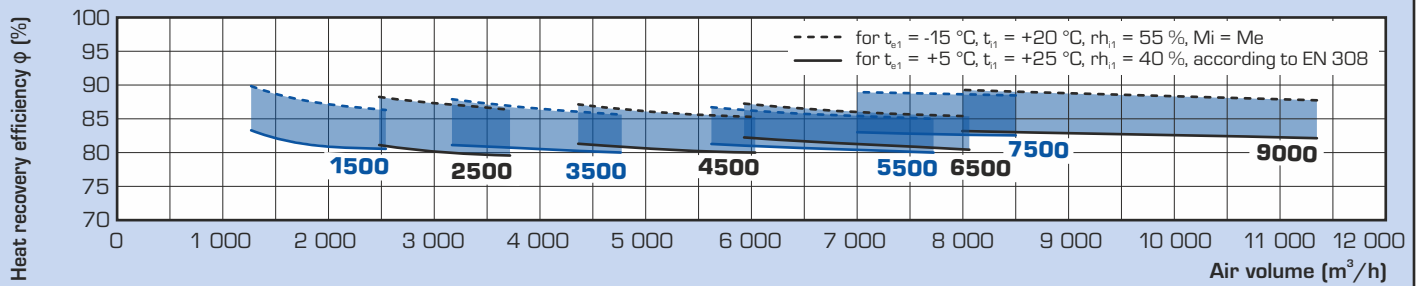


## HEATING AND COOLING PERFORMANCES

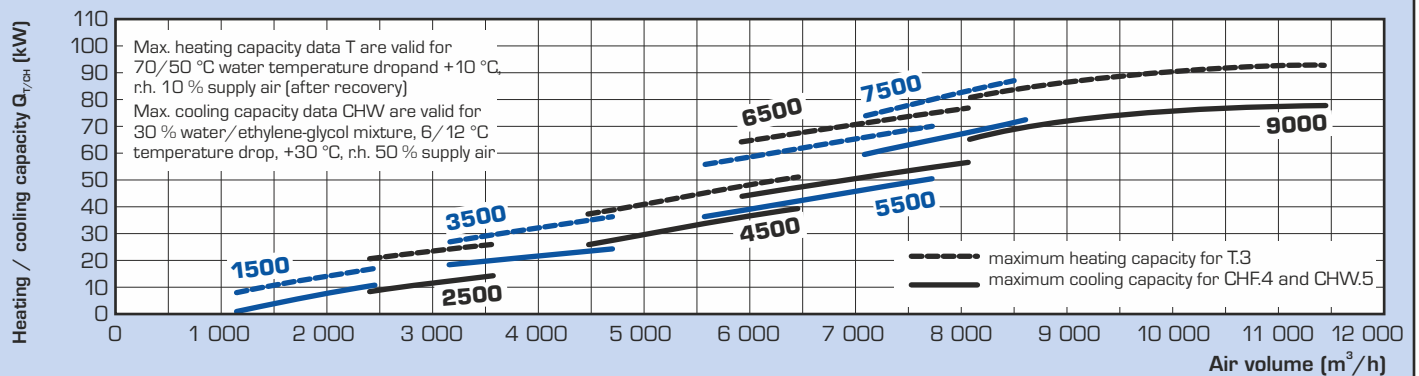


## BASIC DIMENSIONS

**1500-6500 MultiEco-N**  
configuration 4/16

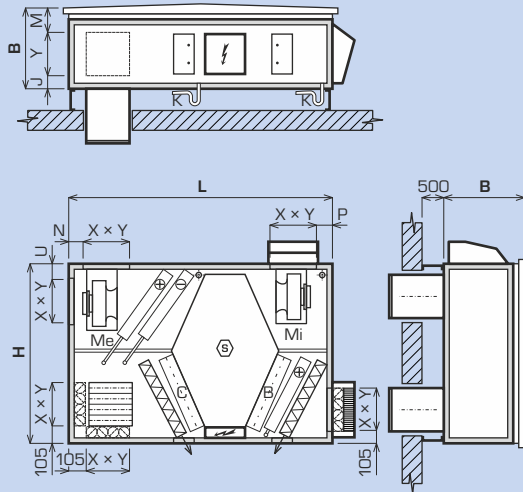



**7500-9000 MultiEco-N**  
configuration 10/0

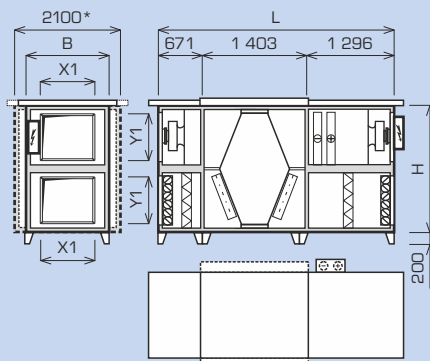

\* dimension only for DUPLEX 9000 MultiEco-N

## BASE FRAME (optional accessory)


**1500-6500 MultiEco-N**

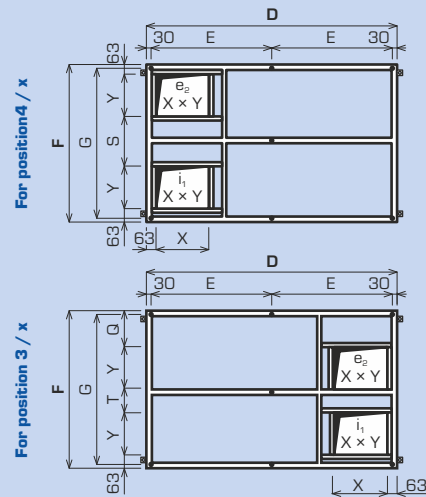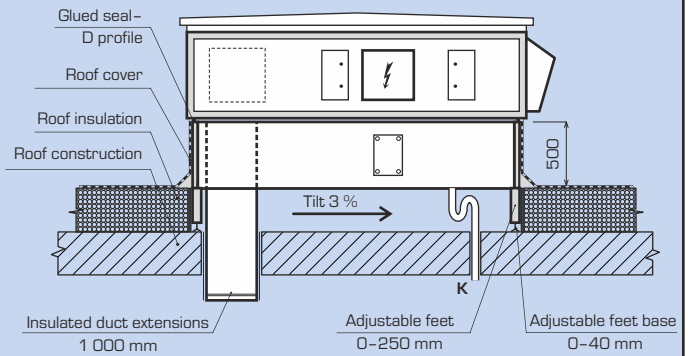

<b>DUPLEX MultiEco-N</b>		<b>1500</b>	<b>2500</b>	<b>3500</b>	<b>4500</b>	<b>5500</b>	<b>6500</b>	<b>7500</b>	<b>9000</b>
Dimension H	mm	1 605	1 605	1 605	1 605	1 605	1 700	1 795	1 795
Dimension B	mm	615	745	830	1 050	1 230	1 450	1 620	1 620
Length L	mm	2 560	2 560	2 560	2 560	2 560	2 650	3 370	3 370
Dimension N	mm	130	105	105	105	105	105	-	-
Dimension U	mm	270	105	105	105	105	105	-	-
Dimension P	mm	135	105	105	105	105	105	-	-
Dimension J	mm	100	100	165	225	315	340	-	-
Dimension M	mm	155	185	205	265	355	350	-	-
Condensate drain	mm	ø 32							
<b>Connecting ports</b>									
Dimension X x Y	mm	300 x 300	400 x 400	400 x 400	500 x 500	500 x 500	700 x 500	900 x 710	900 x 710
<b>Base frame</b>									
Dimension D	mm	2 530	2 530	2 530	2 530	2 530	2 625	-	-
Dimension F	mm	1 585	1 585	1 585	1 585	1 585	1 670	-	-
Dimension E	mm	1 235	1 235	1 235	1 235	1 235	1 289	-	-
Dimension G (between anchoring holes)	mm	1 525	1 525	1 525	1 525	1 525	1 610	-	-
Dimension S	mm	659	459	459	259	259	344	-	-
Dimension Q	mm	289	189	189	89	89	202	-	-
Dimension T	mm	433	333	333	233	233	205	-	-

Note: For detailed design and technical data we recommend using our dedicated selection software.

## TYPES AND DIMENSIONS OF CONNECTING PORTS

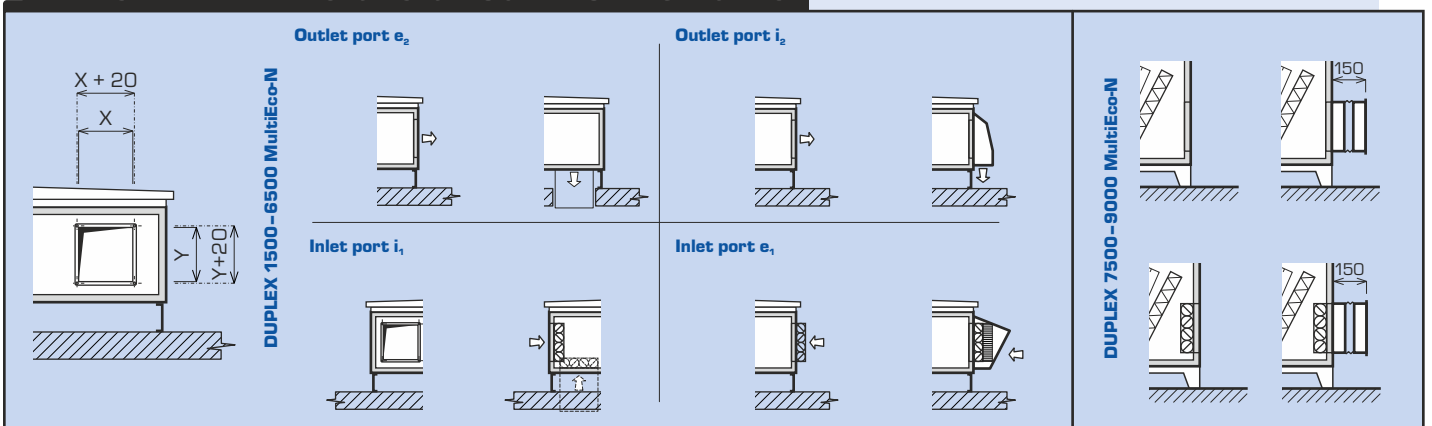

# INSTALLATION AND VERSIONS OF DUPLEX MULTIECO-N



## INSTALLATION VERSIONS AND CONNECTING PORTS

DUPLEX 1500 to 9000 MultiEco-N units are available in a range of versions to facilitate their installation on the roof (outside). Rooftop units enable to go through the roof which is an excellent solution that saves material and labour costs in ducting and also significantly saves the energy lost

Detailed drawings are shown in the summary table "Mounting positions". DUPLEX units are characterised by a wide range of accessories - the ports may be optionally fitted with flexible flanges, duct extensions or special hoods if required.



## MOUNTING POSITIONS AND PORT CONFIGURATION

### DUPLEX 1500-6500 MultiEco-N

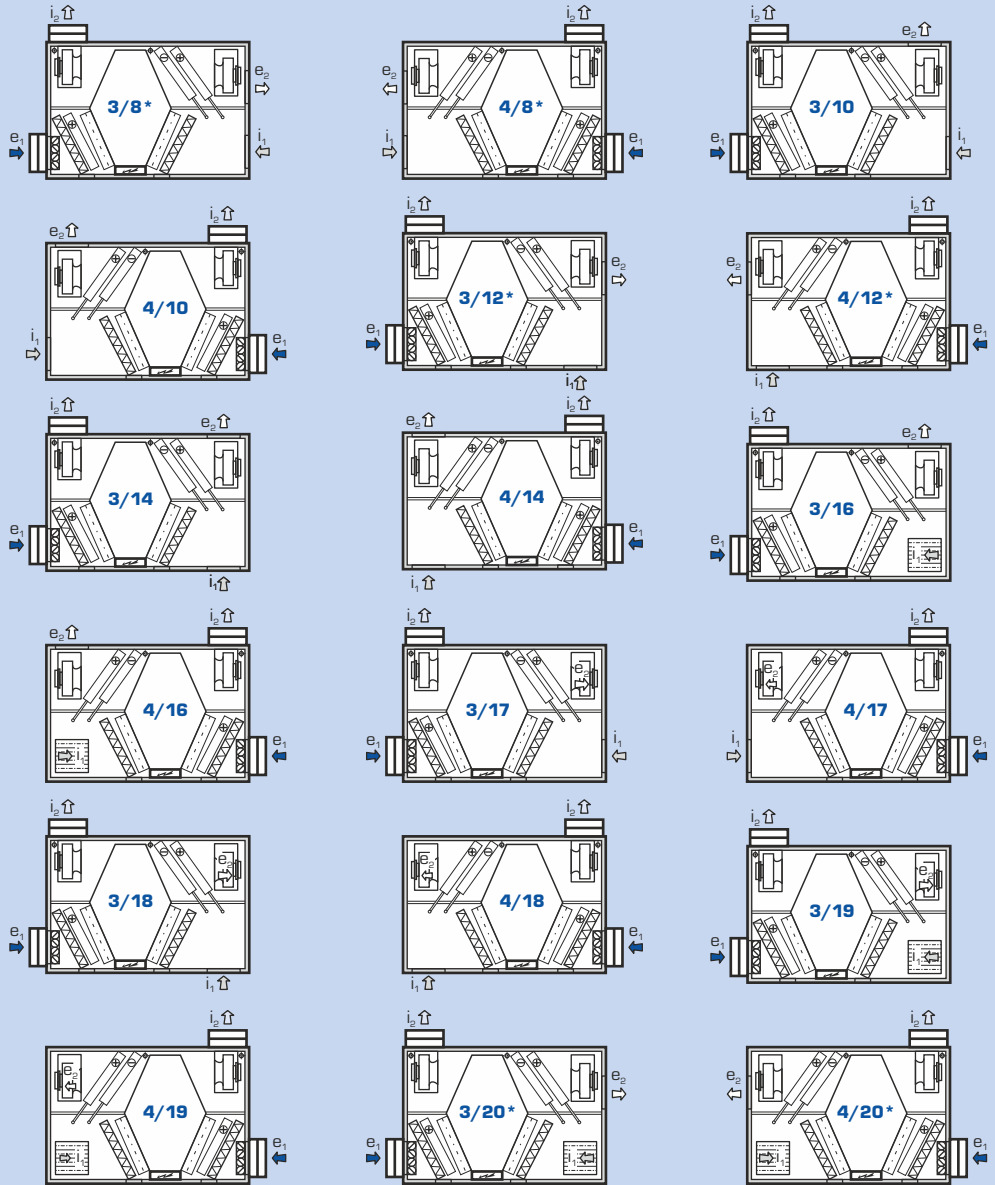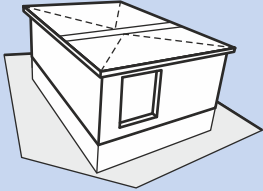


\* DUPLEX 3500-6500 MultiEco-N with max. one coil

### DUPLEX 7500-9000 MultiEco-N

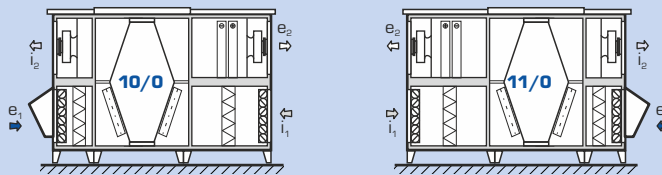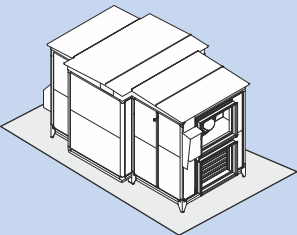

## MOUNTING POSITIONS - CONNECTIONS THROUGH THE ROOF


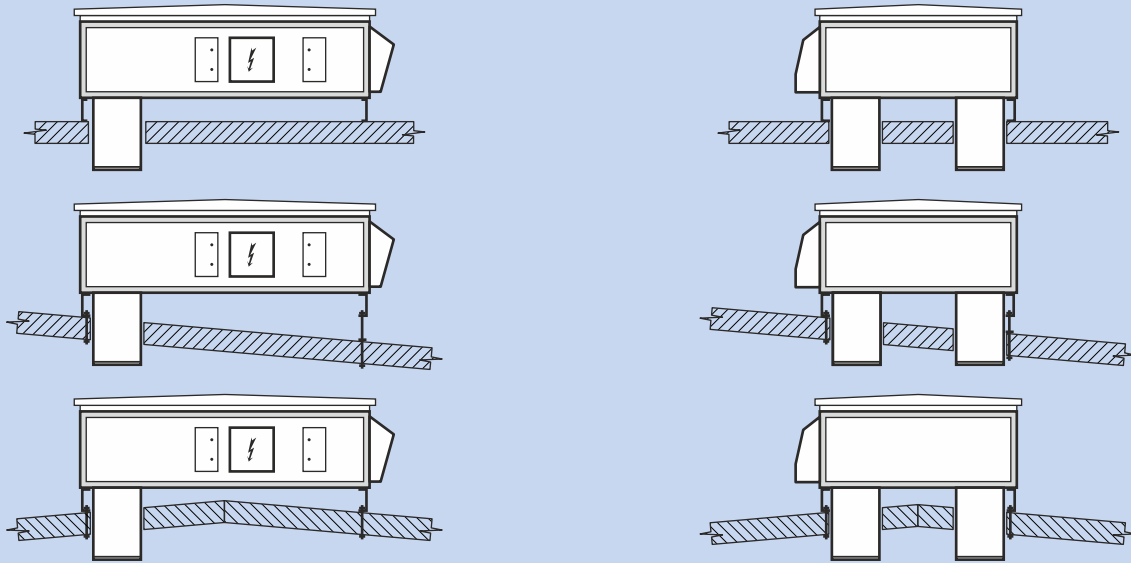


## HANDLING SPACE

DUPLEX units must be installed with the prescribed handling space around the unit in mind.  
Below the unit at least 150 mm must be left to install the DN 32

condensate drain line. This line must run through a U-bend at least 150 mm high into a sewer. Handling space in front of the unit must be maintained for replacing filters.

1500-6500 MultiEco-N

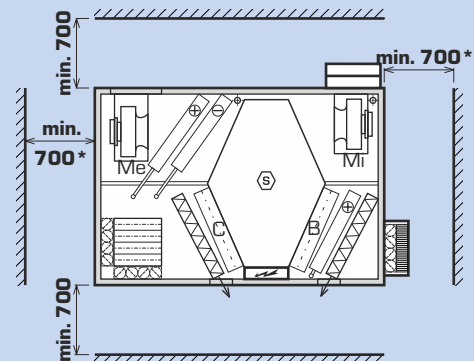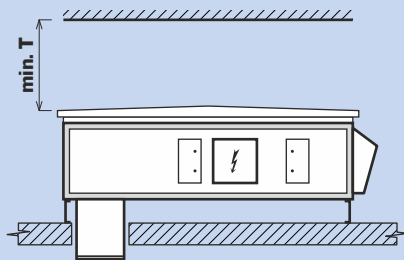


\* only for units with built-in coil

handling space in front of the door  
wall

control manifolds for coils  
wall

control module

7500-9000 MultiEco-N

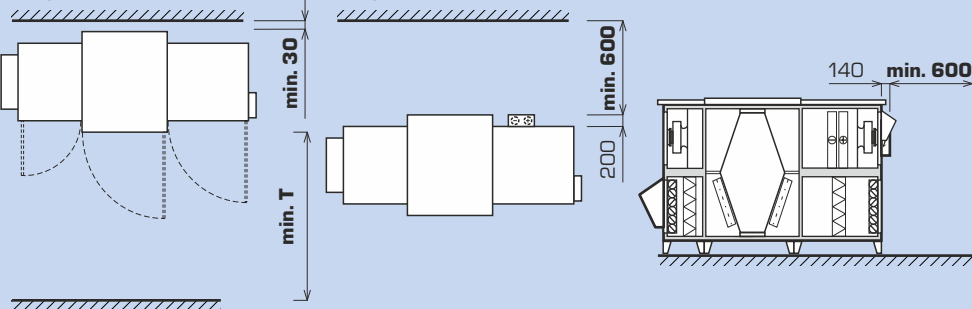

Type	T (mm)
DUPLEX 1500 MultiEco-N	600
DUPLEX 2500 MultiEco-N	700
DUPLEX 3500 MultiEco-N	800
DUPLEX 4500 MultiEco-N	1 000
DUPLEX 5500 MultiEco-N	1 200
DUPLEX 6500 MultiEco-N	1 400
DUPLEX 7500 MultiEco-N	1 600
DUPLEX 9000 MultiEco-N	1 600

## ACOUSTIC POWER $L_w$ AND ACOUSTIC PRESSURE $L_{D,3}$

Type	Working point	Acoustic power $L_w$ [dB(A)]					Acoustic pressure $L_{D,3}$ [dB(A)] at distance of 3 m
		inlet $e_1$	inlet $i_1$	outlet $e_2$	outlet $i_2$	unit	
DUPLEX 1500 MultiEco-N	1 500 m <sup>3</sup> /h (200 Pa)	57	57	87	87	60	40
DUPLEX 2500 MultiEco-N	2 500 m <sup>3</sup> /h (200 Pa)	57	57	82	82	61	40
DUPLEX 3500 MultiEco-N	3 500 m <sup>3</sup> /h (200 Pa)	58	59	87	88	59	38
DUPLEX 4500 MultiEco-N	4 500 m <sup>3</sup> /h (200 Pa)	65	65	90	90	61	40
DUPLEX 5500 MultiEco-N	5 000 m <sup>3</sup> /h (200 Pa)	67	67	96	95	51	31
DUPLEX 6500 MultiEco-N	6 000 m <sup>3</sup> /h (200 Pa)	66	68	96	88	65	44
DUPLEX 7500 MultiEco-N	7 500 m <sup>3</sup> /h (200 Pa)	65	69	91	92	73	51
DUPLEX 9000 MultiEco-N	8 500 m <sup>3</sup> /h (200 Pa)	67	66	97	97	76	46

# MODIFICATIONS

## DUPLEX MULTIECO-N - BASIC UNIT

### DUPLEX xxxx MultiEco-N



#### DUPLEX 1500-6500 MultiEco-N

The compact unit consists of supply and exhaust fans in semispiral casing with anti-vibration mounting, removable counterflow air-to-air heat recovery core assembled from thin plastic plates, removable Coarse 60 % (G4), ePM10 50 % (M5) or ePM1 55 % (F7) supply and exhaust air filters, and a condensate pan with DN 32 flexible hose. Top doors enable easy access to all built-in components. Front doors for easy filters changing.

#### DUPLEX 7500-9000 MultiEco-N

The unit consists of 3 separate sections:

1 - supply free-wheel fan with electric motors in anti-vibration mounting, removable supply filter Coarse 60 % (G4), ePM10 50 % (M5) or ePM1 55 % (F7).

2 - cross-flow heat recovery exchanger with an electric motor, a belt pulley and a belt

3 - exhaust free-wheel fan with electric motors in anti-vibration mounting, removable exhaust filter Coarse 60 % (G4), ePM10 50 % (M5) or ePM1 55 % (F7).

A front door enables easy access to all built-in components and filters.

The units meet requirement in accordance with Commission regulation (EU) No. 1253/2014 (Ecodesign) in the defined working area.

#### Fans


All units are equipped with high-efficiency fans (ebm-papst and Ziehl Abegg) with free-running impellers and backward curved blades. Whole range of DUPLEX 1500 to 9000 MultiEco-N fans meets the requirements of the European directive ErP 2015.

Me.xxx; Mi.xxx

#### Heat recovery exchanger

The only heat recovery core type made of plastic in counterflow arrangement with high efficiency - up to 93 %.

S7.C




## DUPLEX MULTIECO-N - MODIFICATION DESCRIPTION



#### By-pass („B“)

By-pass of the plate heat recovery core on supply air side. By-pass consists of an opposed-blade damper and an actuator. It is fitted next to the recovery core inside the unit; it does not increase size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.

B.x



#### Mixing damper („C“)

The mixing damper is used to mix exhaust and supply air. Circulation valve consists of an opposed-blade damper and actuator. It is fitted next to the recovery core inside the unit; it does not increase the size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.


C.x



#### Hot water heating coil („T“)

Built-in water-to-air three-row (possibly five-row) heating coil; made of copper pipes and aluminum fins. Designed for systems up to 110 °C and 1,0 MPa. The coil is standardly equipped with flexible connection and a steam-gas capillary thermostat for freeze protection. Units in modification T (with heating coil) must be equipped with e, supply air shutoff damper; an actuator with spring-return function is recommended. A coil hydraulic kit for heating capacity control of RE-TPO4 or RE-TPO3 type can be supplied with the coil upon request. Due to roof installation we strictly recommend to use non-freezing liquid.

T.x



#### Electric heating coil („E“)

Integrated electric heating coils consist of PTC (Positive Temperature Coefficient) cells; they are generally used to heat up supply air. By default, electric heating coils always include protective thermostats (operational as well as emergency with manual reset) and regulation module KM featuring power switching elements with so called "zero" switching function (SSR). Built-in electric heating coils are offered in the 1500-6500 MultiEco-N units in two power options (basic and powerful). For more information please refer to the selection software DUPLEX.


E.x



#### Direct expansion (DX) coil („CHF“)

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage and a pressure switch for freeze alarm. Three- or four-row coils with various evaporate temperature are chosen depending on capacity required, refrigerant type and air parameters. Optionally it is possible to deliver double-circuit evaporator in division 1:1 or 1:2, or completely atypical with needed capacity.

CHF.x



#### Chilled water cooling coil („CHW“)

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage. Three- or five-row coils are chosen depending on capacity required, cooling medium type and air parameters. The cooling coil can be equipped with the R-CHW2 or R-CHW3 hydraulic kit on request.

CHW.x



#### Integrated pre-heater („PT“)

Built-in water-to-air three-row heating coil; made of copper pipes and aluminum fins. Designed for systems up to 110 °C and 1,0 MPa. Non-freezing liquid must be used.

PT.x

## OTHER OPTIONAL ACCESSORIES (BASIC OVERVIEW)

Ke.xxx; Ki.xxx

### Shutoff damper e<sub>1</sub>; i<sub>1</sub>

Shutoff dampers standardly fitted with BELIMO actuators are located in the air inlet port. The following damper types are available:

- fresh air damper e<sub>1</sub> - mandatory for C modification (with mixing damper) and T, PT modification (with heating coil)
- exhaust air damper i<sub>1</sub>



Fe.xxx; Fi.xxx

### Air filtration

All DUPLEX MultiEco-N units can be equipped with supply or exhaust air filtration of ePM10 50 % (M5) or ePM1 55 % (F7) classes instead of standard Coarse 60 % (G4) class. Pressure drop of the filter is then 50 to 100 Pa (clean filter) depending on air flow rate, unit type and dirt accumulated.



RE-TPO.x

### Heating coil hydraulic kit

Its function is to control heating capacity of a heating coil. It consists of a three-speed pump, two globe shutoff valves and connection pipes. Further equipment depends on the type:

- RE-TPO4 - four-way mixing valve with an actuator for digital control system
- RE-TPO3 - three-way mixing valve with an actuator for digital control system



R-CHW.x

### Cooling coil hydraulic kit

Its function is to control cooling capacity of a chilled-water cooling coil. It always consists of two globe shutoff valves and connection pipes. Further equipment depends on the type:

- R-CHW3 - three-way mixing valve with an actuator
- R-CHW2 - throttling valve with an actuator for digital control system



### Hot water heating coil (TPO)

Separately supplied coil for installation into round duct. It is suitable for cramped locations, where it is impossible to put the coil inside the unit, as well as for rooftop units. The coil is standardly equipped with the steam-gas capillary thermostat.



### Electric heating coil (EPO-V)

Separately supplied heating coil to be fitted into round or rectangular duct. Capacities and diameters can be found in respective catalogue sheets.



FK.x

### Spare cartridge filters

Replacement filter cartridges in different sizes based on the unit type. Available in Coarse 60 % (G4), ePM10 50 % (M5), ePM1 55 % (F7) filtration classes.



H.P

### Flexible connections


Ports can be equipped with flexible connections upon request.



CF.XXX

### Constant air flow and pressure

Manometers reading fan pressure together with controls, enables intelligent fan control of preselected airflow. This accessory assumes the unit is equipped with digital controls of aMotion type. Using a second manometer (optional accessory) in the supply air duct enables the user to control constant pressure in the supply duct.



### Insulated duct extension

Rectangular duct extension for connection through the roof. The casing is made from sandwich panels with mineral insulation. Standard length is 1 m.



MFF

### Tube manometers

Accessory for filters for simple view of current pressure drop. The tube manometers are obligatory for hygienic unit design in accordance with the VDI 6022.



### Base frame

Dismountable base frame with integrated PIR (30 mm) insulation and service doors. Standard height 500 mm, others on request. Available only for DUPLEX 1500-6500 Multi-N Rooftop.



### Feet

The MultiEco-N units can be equipped with adjustable feet (alternative to base frame).



### Special hoods

Special weatherproof hoods for inlet (e<sub>1</sub>) and outlet (i<sub>2</sub>) ports. The hood for e<sub>1</sub> port in combine with integrated droplet eliminator.



# CONTROLS

DUPLEX MultiEco-N units are delivered with basic control components or with complete control systems.

There are three types of control systems available (Basic, CPM and aMotion) according to customer needs and an application. The systems also include variety of sensors (temperature, humidity, air quality, CO<sub>2</sub>) for effective operation control.

## Features of the control systems

- selection of the most suitable and efficient control system at the lowest cost, depending on the particular application
- control system is integrated with the unit, most components are already wired and checked in factory, thus reducing the risk of incorrect wiring
- no control system project documentation is necessary for standard cases, standardized solutions can be used
- simple wiring, system simplicity, error indication
- qualified technical support and consulting

## SUMMARY OF DUPLEX MULTIECO-N CONTROL SYSTEMS

Type	Use	Controller
<b>“Basic” controls</b>	<ul style="list-style-type: none"> <li>- all electrical components are wired to a junction box terminal strip inside or outside the unit</li> <li>- standard components are fans, damper actuators, capillary freeze protection thermostat of hot water heating coil</li> <li>- more components are included upon customer's request (exact actuator type, sensors, thermostats, pressure switches etc.)</li> <li>- suitable for applications with separate delivery of control system; e.g. large buildings with central control system etc.</li> </ul>	<div style="border: 1px solid black; padding: 5px; text-align: center;"> <b>basic version</b>            (fans, actuators, thermostats, pressure switches and others on request)         </div> <div style="text-align: center;"> </div> <div style="border: 1px solid black; padding: 5px; text-align: center; margin-top: 10px;">           Supervisory control system         </div>
<b>“CPM” controls</b>	<p><b>Standard functions</b></p> <ul style="list-style-type: none"> <li>- EC fan speed control (stepless)</li> <li>- automatic by-pass damper position</li> <li>- frost protection of heat exchanger</li> <li>- switching of electric or water heater</li> <li>- input for external switch</li> <li>- inlet and outlet shut-off damper control</li> <li>- minimum and maximum fan speed preselection</li> <li>- analogue input (0-10 V) for air quality sensor (CO<sub>2</sub>, RH)</li> <li>- outputs for controlling electrical preheater and heater (pulse switched 10 V) or water heater (controlled by 0-10 V signal)</li> <li>- outputs for controlling cooling (direct or water), eventually heat pump</li> </ul> <p><b>Controller CPM</b></p> <ul style="list-style-type: none"> <li>- fully graphic touchscreen</li> <li>- weekly program</li> <li>- „party” mode</li> <li>- „holiday” mode</li> <li>- filter change notice</li> <li>- automatic operation based on constant signal - e.g. constant pressure</li> </ul> <p><b>Controller CP 10 RA</b></p> <ul style="list-style-type: none"> <li>- rotatable controller</li> </ul>	<div style="text-align: center;"> <p><b>CPM controller</b> with touchscreen display</p> </div> <div style="text-align: center; margin-top: 20px;"> <p><b>CP 10 RA</b> with mechanical knob</p> </div>
<b>“aMotion” controls</b>	<p><b>Standard aMotion control functions</b></p> <p><b>Elementary aM-CE basic module</b></p> <ul style="list-style-type: none"> <li>- EC fans speed control (according to selected mode)</li> <li>- Automatic heat and cool recovery control (by-pass control)</li> <li>- Evaluates and prevents all emergency conditions according to the measured values</li> <li>- Possibility of setting basic and user scenes and weekly calendars to select modes, power, temperatures and other functions</li> <li>- Ethernet connection for communication over the Internet</li> <li>- Inputs for external signals - control e.g. from kitchens, toilets and similar</li> <li>- Possibility of connecting air quality sensors (e.g. CO<sub>2</sub> concentration or relative humidity) either by contact, 0-10V voltage, or via the bus.</li> <li>- Outputs for continuous control of electric preheater and heater (pulse switched 10 V)</li> <li>- Possibility of connecting up to two controllers of different types</li> <li>- Connection to supervisory control system via Modbus TCP protocol</li> </ul> <p><b>Legendary aM-CL advanced module (with all functions from Elementary aM-CE module and additional options below)</b></p> <ul style="list-style-type: none"> <li>- Control of systems with VAV boxes</li> <li>- Control of systems with heat sources (heat pumps, heat accumulators etc.)</li> <li>- Communication by BACnet protocol over the bus</li> <li>- Possibility of connecting more than two controllers</li> <li>- More than 4 external bus elements (controllers, CO<sub>2</sub> sensors, outdoor temperature sensors,...)</li> <li>- Multiple adjustable scenes (more than 10)</li> <li>- More than 2 user calendars</li> <li>- More than 4 users (excluding service access)</li> </ul> <p><b>Additional module aM-IO18</b></p> <ul style="list-style-type: none"> <li>- Inputs for 4 external signals - control from kitchens, toilets and similar</li> <li>- Hot water heater control (0-10 V)</li> <li>- Control of circulation modes</li> </ul> <p><b>Additional module aM-IO12</b></p> <ul style="list-style-type: none"> <li>- Control of cooling (direct and water) and heat pumps</li> <li>- Rotary regenerator</li> </ul> <p><b>Additional aM-XCF</b></p> <ul style="list-style-type: none"> <li>- Unit control based on flow measurement</li> </ul> <p><b>Additional RD-K module</b></p> <ul style="list-style-type: none"> <li>- Additional inputs and outputs significantly expanding the control system functionality</li> </ul> <p><b>BACnet / KNX converter</b></p> <ul style="list-style-type: none"> <li>- Connection to the superior system via BACnet or KNX protocol</li> </ul>	<p><b>aTouch (touchscreen)</b></p> <div style="text-align: center;"> </div> <p><b>aDot (touchscreen)</b></p> <div style="text-align: center;"> </div> <p><b>aSpace (internet interface)</b></p> <div style="text-align: center;"> </div>