

# DUPLEX

## 1400 to 10100 Basic-V

All-purpose ventilation units

with cross-flow heat

recovery exchangers – upright

DUPLEX 1400 to 10100 Basic-V are compact ventilation units with cross-flow heat recovery exchanger in upright configuration. They are solely intended for applications that do not come under the field of activity of the Committee's Regulation (EU) No. 1253/2014.

DUPLEX Basic-V units are compact appliances containing in a single cabinet two independently controlled EC fans with backward curved blades a heat recovery exchanger with large heat-transfer surface and high efficiency, slide-out supply and exhaust air class G4, M5 or F7 filters, drain pans and possibly also an internal bypass with a servo drive and a circulation damper with a servo drive.

The cabinet has a sandwich structure and consists of painted sheet and 30 mm of PIR fill with an outstanding heat transfer coefficient ( $\lambda = 0,024 \text{ W/mK}$ ).

### DUPLEX Basic-V ventilation units meet the requirements of the most stringent European standards:

- Casing properties according to EN 1886
- EC motors according to ErP 2015
- SFP < 0,45 W/(m<sup>3</sup>/h) according to PassivHaus\*
- Hygienic requests according to VDI6022

\* in the defined working area



### Advantages of DUPLEX Basic-V units:


- New design of ventilation units with excellent parameters
- Great thermal insulation of the casing (class T2)
- Reduced thermal bridging (class TB1)
- Compact dimensions
- Ease of installation
- Unified dimensions of ports
- Optional versions with a bypass and circulation damper
- High efficiency fans – SFP < 0,45 W/(m<sup>3</sup>/h)\*
- High heat recovery efficiency of the cross-flow heat recovery exchanger – up to 75 %
- Integrated control system including temperature sensors
- Integrated web server (RD5 control system only)
- Comfortable unit control with touchscreen controller
- Comprehensive selection software

1400 to 10100 Basic-V


### AVAILABLE MODIFICATIONS (CAN BE COMBINED)

- |     |                                  |       |                                   |
|-----|----------------------------------|-------|-----------------------------------|
| - B | with in-built bypass damper      | - T   | with in-built hot-water heater    |
| - C | with in-built circulation damper | - CHF | with in-built direct chiller      |
| - E | with in-built electrical heater  | - CHW | with in-built water-based chiller |


### OPERATING MODES OF DUPLEX BASIC-V UNITS



Ventilation with heat recovery with re-heating (with cooling)



Circulation heating or cooling



Ventilation without heat recovery (via bypass)

- e<sub>1</sub> ... Fresh outdoor air suction  
 ↻ e<sub>2</sub> ... Fresh filtered air outlet

- ↻ i<sub>1</sub> ... Exhaust air suction  
 ↻ i<sub>2</sub> ... Exhaust air outlet

- T/E... Central heating / electrical heater connection  
 CH ... Cooling connection

### SELECTION SOFTWARE



For the detailed design of DUPLEX series units, accessories and control systems we recommend using our dedicated design software. You can find it on our website at [www.atrea.eu](http://www.atrea.eu) or request a CD at our office.

**Atrea®**

UNIT VENTILATORS & HEAT RECOVERY

ATREA s.r.o., Čs. armády 32  
 466 05 Jablonec n. Nisou  
 Czech Republic



[www.atrea.eu](http://www.atrea.eu)

Tel.: +420 483 368 111  
 Fax: +420 483 368 112  
 E-mail: [atrea@atrea.eu](mailto:atrea@atrea.eu)

# PERFORMANCE GRAPHS

## DUPLEX BASIC

DUPLEX Basic-V		1 400	2 400	3 400	5 400	7 100	8 100	10 100
Supply air – max. <sup>1)</sup>	m <sup>3</sup> h <sup>-1</sup>	1 600	2 700	4 000	5 700	7 900	8 100	10 750
Extraction air – max. <sup>1)</sup>	m <sup>3</sup> h <sup>-1</sup>	1 500	2 250	3 500	5 700	7 850	8300	10 750
Heat recovery efficiency <sup>2)</sup>	%	až 75 %						
Number of versions and positions	-	2						
Weight <sup>3)</sup>	kg	190-270	200-280	290-370	320-390	370-450	480-560	580-670
Max. power input	kW	0,7	1,2	2,4	4,7	6,5	7,2	9,6
Voltage	V	230	230	400	400	400	400	400
Frequency	Hz	50						
Revolutions – max.	min <sup>-1</sup>	3 350	2 900	2 980	2 960	2 700	2 800	2 570
Heating output E low – max. <sup>5)</sup>	kW	2,1	2,1	4,2	7,2	7,2	9,9	9,9
Heating output E high – max. <sup>5)</sup>	kW	4,2	4,2	8,4	10,8	12,6	14,7	14,7
Heating output T – max. <sup>4)</sup>	kW	20	27	34	51	64	76	94
Cooling output CHW – max. <sup>4)</sup>	kW	12	18	25	35	51	60	68
Cooling output CHF – max. <sup>4)</sup>	kW	11	15	18	31	48	58	65

<sup>1)</sup> Maximum flow rate through units at zero external pressure


<sup>2)</sup> According to air volume

<sup>3)</sup> Depending on equipment


<sup>4)</sup> Depending on register type, liquid and flow rates

<sup>5)</sup> For detailed information please use our DUPLEX selection software.


## PERFORMANCE SUMMARY

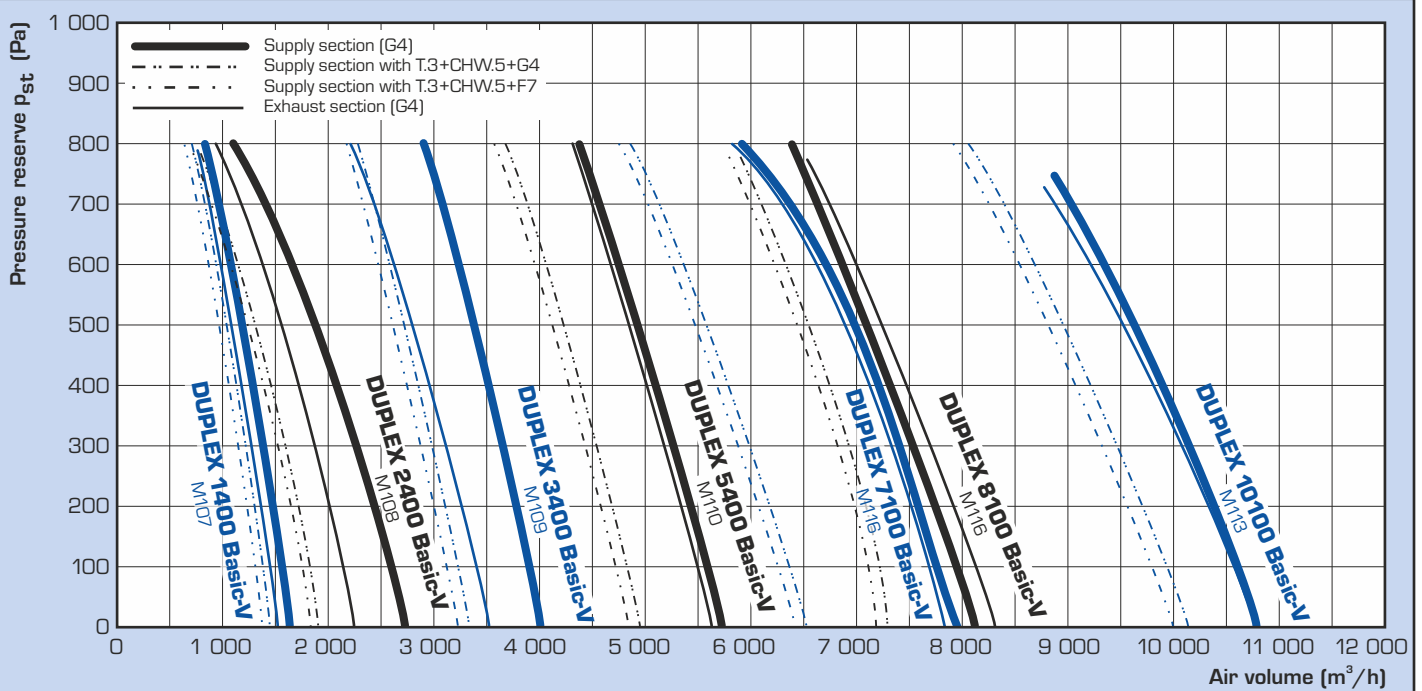

## HEAT RECOVERY EFFICIENCY

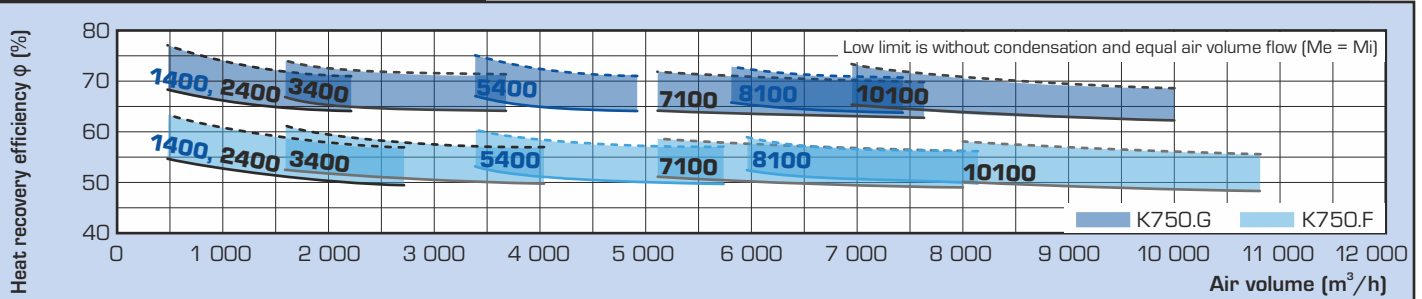


## HEATING AND COOLING PERFORMANCES

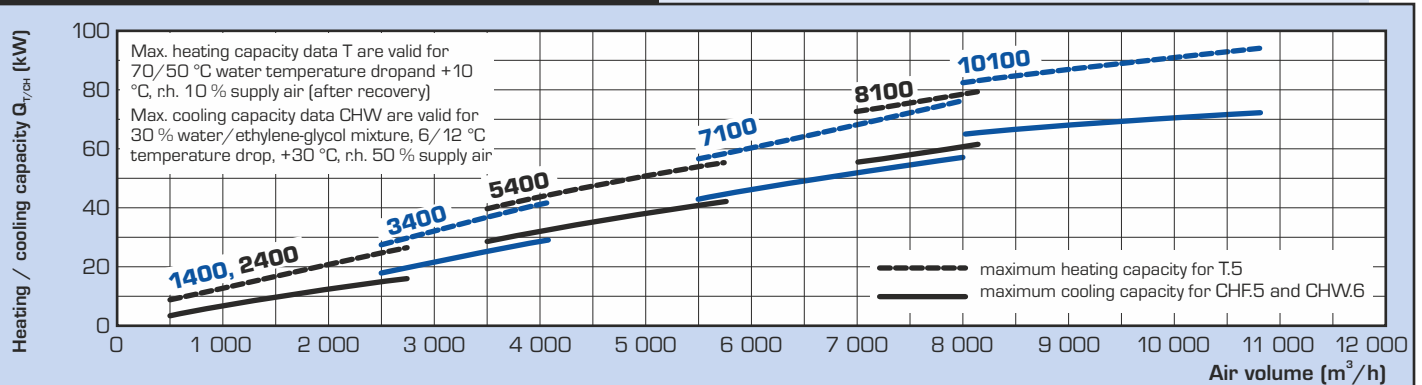

## BASIC DIMENSIONS


### UPRIGHT Basic-V 1400 to 10100

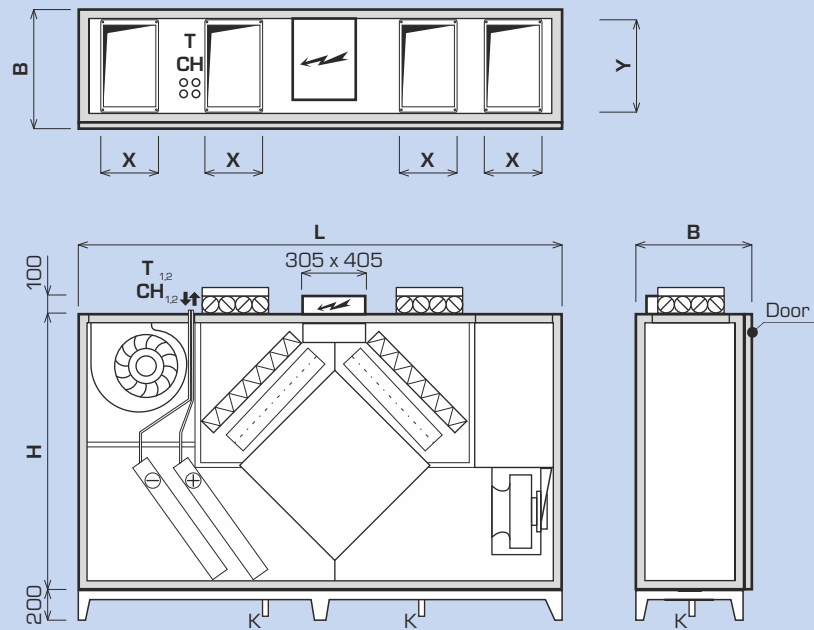


<b>DUPLEX Basic-V</b>		<b>1400 / 2400</b>	<b>3400</b>	<b>5400</b>	<b>7100</b>	<b>8100</b>	<b>10100</b>
Dimension <b>H</b>	mm	1 600	1 600	1 600	1 600	1 600	1 600
Dimension <b>B</b>	mm	455	580	665	885	1 065	1 295
Length <b>L</b>	mm	2 600	2 600	2 800	2 800	2 800	2 800
Condensate drain line	mm	$\varnothing$ 32					
<b>Connecting ports</b>							
Dimension <b>X x Y</b>	mm	300 x 250	300 x 400	400 x 400	400 x 600	400 x 710	400 x 900

## TYPES AND DIMENSIONS OF CONNECTING PORTS


**Basic port**  
(inlet, outlet)




**Port with flexible flange**  
(inlet, outlet)



**Port with damper**  
(inlet only)



**Port with damper and flexible flange**  
(inlet only)



For more detailed technical information check out ATREA selection software.

# INSTALLATION AND VERSIONS

## INSTALLATION VERSIONS AND CONNECTING PORTS

DUPLEX 1400 to 10100 Basic-V units are available in 2 configurations to facilitate their installation in the machine room.


DUPLEX Basic-V units are characterised by a wide range of accessories – the ports may be optionally fitted with flexible flanges and inlet ports may have shut-off dampers if required.

## MOUNTING POSITIONS


### UPRIGHT POSITION

Basic-V 1400 to 10100

configuration 50/0 – door-side view

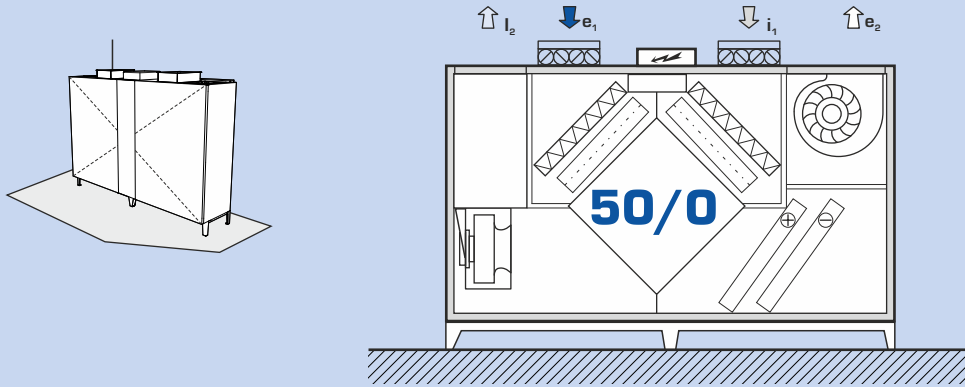

configuration 51/0 – door-side view

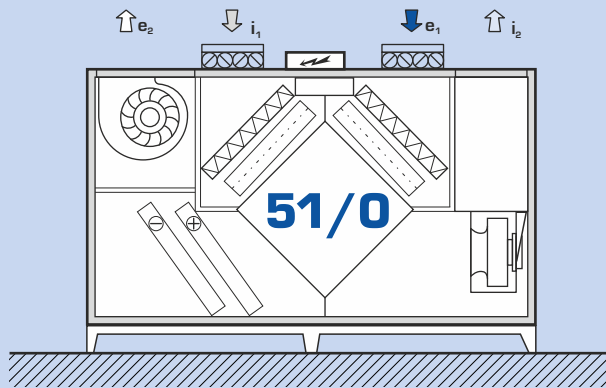


For more detailed technical information check out ATREA selection software.

## OTHER CONFIGURATIONS OF DUPLEX BASIC


### FLOOR-STANDING

DUPLEX Basic 1400 to 10100




### UNDER-CEILING

DUPLEX Basic 1400 to 8100




### FLOOR-STANDING - FLAT

DUPLEX Basic 1400 to 8100



### ROOFTOP UNITS - FLAT

DUPLEX Basic-N 1400 to 10100




For detailed information please see separate technical catalogues.

## HANDLING SPACE


DUPLEX units must be installed with the prescribed handling space around the unit in mind. Below the unit at least 150 mm must be left to install the DN 32 condensate drain line. This line must run through a U-bend at least 150 mm high into a sewer. This space is easily provided when the steel supporting feet supplied as standard are used. Handling space in front of the unit must be maintained for opening the front door, replacing filters and providing servicing and installation access to each unit part.

Each drawing shows the minimum handling space. In addition, each unit must have the minimum handling space of 600 mm from the side of the control system electric switchboard according to CSN.

### Handling space in front of the door

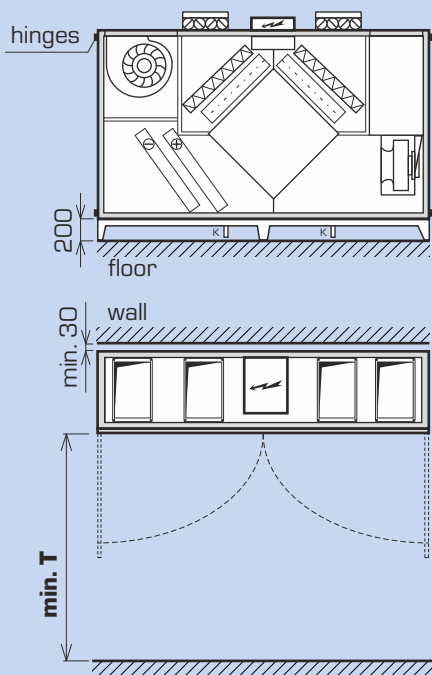

### Handling space for accessories control modules

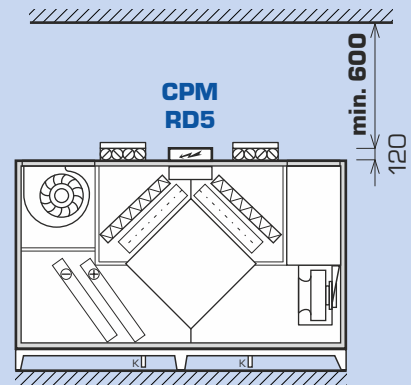

Type	standard door <b>T</b> (mm)	hingeless door <b>T</b> (mm)
DUPLEX 1400 Basic-V	1 400	500
DUPLEX 2400 Basic-V	1 400	500
DUPLEX 3400 Basic-V	1 400	600
DUPLEX 5400 Basic-V	1 500	680
DUPLEX 7100 Basic-V	1 500	900
DUPLEX 8100 Basic-V	1 500	1 100
DUPLEX 10100 Basic-V	1 500	1 300

## ACOUSTIC POWER $L_w$ AND ACOUSTIC PRESSURE $L_{p_s}$

Type	Working point	Acoustic power $L_w$ [dB(A)]					Acoustic pressure $L_{p_s}$ [dB(A)] at distance of 3 m
		inlet $e_1$	inlet $i_1$	outlet $e_2$	outlet $i_2$	unit	
DUPLEX 1400 Basic-V	1 000 m <sup>3</sup> /h (200 Pa)	52	58	82	78	64	44
DUPLEX 2400 Basic-V	2 000 m <sup>3</sup> /h (200 Pa)	62	72	85	89	72	51
DUPLEX 3400 Basic-V	3 000 m <sup>3</sup> /h (200 Pa)	73	70	92	99	76	55
DUPLEX 5400 Basic-V	4 500 m <sup>3</sup> /h (200 Pa)	65	68	90	84	76	55
DUPLEX 7100 Basic-V	6 000 m <sup>3</sup> /h (200 Pa)	69	72	97	85	78	57
DUPLEX 8100 Basic-V	7 500 m <sup>3</sup> /h (200 Pa)	76	77	97	93	86	66
DUPLEX 10100 Basic-V	9 500 m <sup>3</sup> /h (200 Pa)	85	81	97	94	79	59

# MODIFICATIONS

## DUPLEX BASIC-V - BASIC UNIT



### Basic configuration

The compact unit consists of supply and exhaust centrifugal fans with electric motors in anti-vibration mounting, removable cross-flow air-to-air heat recovery core assembled from thin plastic plates, removable G4, M5 or F7 supply and exhaust air filters, and a condensate pan with flexible hose. A front door enables easy access to all built-in components and filters.

DUPLEX xxxx Basic-V



### Fans

All units are equipped with high-efficiency fans (ebm-papst and Ziehl Abegg) with free-running impellers and backward curved blades. Whole range of DUPLEX 1400 to 10100 Basic-V fans meets the requirements of the European directive ErP 2015.

Me.xxx; Mi.xxx



### Heat recovery core

For every single unit size are two heat recovery exchangers available (K750.F and K750.G), that differs in heat recovery efficiency and pressure loss.

K.750.x

## DUPLEX BASIC-V - MODIFICATION DESCRIPTION




### By-pass („B“)

By-pass of the plate heat recovery core on supply air side. By-pass consists of an opposed-blade damper and an actuator.

It is fitted next to the recovery core inside the unit; it does not increase size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.


B.x



### Mixing damper („C“)

The mixing damper is used to mix exhaust and supply air. Circulation valve consists of an opposed-blade damper and actuator. It is fitted next to the recovery core inside the unit, it does not increase the size of the unit. The standard actuator is BELIMO 24 V; other types are available upon request.


C.x



### Hot water heating coil („T“)

Built-in water-to-air three-row (possibly multi-row) heating coil; made of copper pipes and aluminum fins. Designed for systems up to 110 °C and 1,0 MPa. The coil is standardly equipped with flexible connection and a steam-gas capillary thermostat for freeze protection. Units in modification T (with heating coil) must be equipped with e, supply air shutoff damper; an actuator with spring-return function is recommended. An external coil hydraulic kit for heating capacity control of RE-TPO4 or RE-TPO3 type can be supplied with the coil upon request.


T.x



### Electric heating coil („E“)

Integrated electric heating coils consist of PTC (Positive Temperature Coefficient) cells; they are generally used to heat up supply air. By default, electric heating coils always include protective thermostats (operational as well as emergency with manual reset) and regulation module KM featuring power switching elements with so called "zero" switching function (SSR). Built-in electric heating coils are offered in the 1400-10100 Basic-V units in two power options (basic and powerful). For more information please refer to the selection software DUPLEX.


E.x



### Direct expansion (DX) coil („CHF“)

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage and a pressure switch for freeze alarm. Three- or multi-row coils with various evaporate temperature are chosen depending on capacity required, refrigerant type and air parameters. Optionally it is possible to deliver double-circuit evaporator in division 1:1 or 1:2, or completely atypical with needed capacity.

CHF.x




### Chilled water cooling coil („CHW“)

A built-in coil made of copper pipes and aluminum fins, including a condensate pan with individual condensate drainage. Three- or multi-row coils are chosen depending on capacity required, cooling medium type and air parameters. The cooling coil can be equipped with the R-CHW2 or R-CHW3 external hydraulic kit on request.

CHW.x


## OTHER OPTIONAL ACCESSORIES (BASIC OVERVIEW)



**Shutoff damper e<sub>1</sub>; i<sub>1</sub>** Ke.xxx; Ki.xxx


Shutoff dampers standardly fitted with BELIMO actuators are located in the air inlet port. The following damper types are available:

- fresh air damper e<sub>1</sub> - mandatory for C modification (with mixing damper) and T modification (with heating coil)
- exhaust air damper i<sub>1</sub>



**Air filtration** Fe.xxx; Fi.xxx


All DUPLEX Basic-V units can be equipped with supply or exhaust air filtration of M5 or F7 class instead of standard G4 class. Pressure drop of the filter is then 50 to 100 Pa (clean filter) depending on air flow rate, unit type and dirt accumulated.



**Heating coil hydraulic kit** RE-TPO.x

Its function is to control heating capacity of a heating coil. It consists of a three-speed pump, two globe shutoff valves and connection pipes. Further equipment depends on the type:


- RE-TPO4 - four-way mixing valve with an actuator for digital control system
- RE-TPO3 - three-way mixing valve with an actuator for digital control system



**Cooling coil hydraulic kit** R-CHW.x


Its function is to control cooling capacity of a chilled-water cooling coil. It always consists of two globe shutoff valves and connection pipes. Further equipment depends on the type:

- R-CHW3 - three-way mixing valve with an actuator
- R-CHW2 - throttling valve with an actuator for digital control system



**Tube manometers** MFF

Accessory for filters for simple view of current pressure drop. The tube manometers are obligatory for hygienic unit design in accordance with the VDI 6022.




**Spare cartridge filters** FK.x

Replacement filter cartridges in different sizes based on the unit type. Available in G4, M5 and F7 filtration class.


**Delivery of disassembled unit**

All units can be delivered dismantled on request. The unit is to be assembled by rivets and bolts directly on site, therefore the unit can be installed in inaccessible location. Casing insulation class T3, thermal bridging class TB2.




**Flexible connections** H.P

Round and rectangular ports can be equipped with flexible connections upon request.




**Hot water heating coil (TPO)** TPO

Separately supplied coil for installation into round duct. It is suitable for cramped locations, where it is impossible to put the coil inside the unit, as well as for rooftop units. The coil is standardly equipment with the steam-gas capillary thermostat. Capacities and diameters can be found in respective catalogue sheets.




**Electric heating coil (EPO-V)** EPO-V

Separately supplied heating coil to be fitted into round or rectangular duct. Capacities and diameters can be found in respective catalogue sheets.




**Constant air flow and pressure** CF.XXX

Manometers reading fan pressure together with controls, enables intelligent fan control of preselected airflow. This accessory assumes the unit is equipped with digital controls of RD4 type. Using a second manometer (optional accessory) in the supply air duct enables the user to control constant pressure in the supply duct.



**Electric preheaters EPO-V** EPO-V

EPO-V electric heating coils to provide the antifreeze protection of the heat recovery exchanger when equal-pressure ventilation is continuously required. It is installed inside a duct on the outdoor supply air side of the unit (e<sub>1</sub>). Control is provided through the RD4 unit control system.



**Hingeless door**

When needed it is possible to deliver door without standard hinges - than necessary manipulation space is reduced.



# CONTROLS






DUPLEX Basic-V units are delivered with basic control components or with complete control systems.

There are three types of control systems available (Basic, CP and RD5) according to customer needs and an application. The systems also include variety of sensors (temperature, humidity, air quality, CO<sub>2</sub>) for effective operation control.

## Features of the control systems

- selection of the most suitable and efficient control system at the lowest cost, depending on the application
- control system is integrated with the unit, most components are already wired and checked in factory, thus reducing the risk of incorrect wiring
- no control system project documentation is necessary for standard cases, standardized solutions can be used
- simple wiring, system simplicity, error indication
- qualified technical support and consulting

## SUMMARY OF DUPLEX MULTI CONTROL SYSTEMS

Type	Use	Controller
<b>Basic</b>	<ul style="list-style-type: none"> <li>- all electrical components are wired to a junction box terminal strip inside or outside the unit</li> <li>- standard components are fans, damper actuators, capillary freeze protection thermostat of hot water heating coil</li> <li>- more components is included upon customer's request (exact actuator type, sensors, thermostats, pressure switches etc.)</li> <li>- suitable for applications with separate delivery of control system; e.g. large buildings with central control system etc.</li> </ul>	<div style="text-align: center;"> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;"> <b>basic version</b>                      (fans, actuators, thermostats, pressure switches and others on request)                 </div> <div style="text-align: center; margin: 5px 0;">                     ↑                      ↓                 </div> <div style="border: 1px solid black; padding: 5px; width: fit-content; margin: 0 auto;">                     Supervisory control system                 </div> </div>
<b>"RD5" controls</b>	<p><b>Standard functions of the "RD5" controls</b></p> <ul style="list-style-type: none"> <li>- EC fan speed control (based on selected mode)</li> <li>- automatic by-pass damper position (heat and cool recovery)</li> <li>- evaluates and prevents emergency limits based on measured temperature</li> <li>- ventilation and temperature weekly program setting</li> <li>- A web server and an Ethernet interface built in as standard connection for remote internet communication</li> <li>- inputs for switching using 230 V (4 inputs - 3 delayed, 1 instantaneous) - switch e.g. from bathrooms etc.</li> <li>- optional connection of CO<sub>2</sub> or RH sensor - max. 2 sensors with a switch or 0-10 V output</li> <li>- outputs for electric preheater and heater control (pulse 10 V) or hot-water control (0-10 V)</li> </ul> <p><b>Additional RD-IO module</b></p> <ul style="list-style-type: none"> <li>- optional manometer connection to ensure constant airflow control (see Constant airflow and pressure control on previous page)</li> <li>- constant pressure control</li> <li>- cooling control outputs (DX- or chilled-water cooling), possibly for a heat pump</li> </ul> <p><b>Additional RD-K module</b></p> <ul style="list-style-type: none"> <li>- additional inputs and outputs significantly extending control system functions</li> </ul> <p><b>BACnet / KNX converter</b></p> <ul style="list-style-type: none"> <li>- optional converter allowing connection to supervisory control system via BACnet or KNX protocol</li> </ul>	<p><b>CP Touch (touchscreen)</b></p>  <p><b>CP10RT</b></p>  <p><b>Web server (as standard)</b></p> 
<b>"CPM" controls</b>	<p><b>Standard functions</b></p> <ul style="list-style-type: none"> <li>- EC fan speed control (stepless)</li> <li>- automatic by-pass damper position</li> <li>- frost protection of heat exchanger</li> <li>- switching of electric or water heater</li> <li>- input for external switch</li> <li>- inlet and outlet shut-off damper control</li> <li>- minimum and maximum fan speed preselection</li> <li>- analogue input (0-10 V) for air quality sensor (CO<sub>2</sub>, RH)</li> <li>- outputs for controlling electrical preheater and heater (pulse switched 10 V) or water heater (controlled by 0-10 V signal)</li> <li>- outputs for controlling cooling (direct or water), eventually heat pump</li> </ul> <p><b>Controller CPM</b></p> <ul style="list-style-type: none"> <li>- fully graphic touchscreen</li> <li>- weekly program</li> <li>- „party“ mode</li> <li>- „holiday“ mode</li> <li>- filter change notice</li> <li>- automatic operation based on constant signal - e.g. constant pressure</li> </ul> <p><b>Controller CP 10 RA</b></p> <ul style="list-style-type: none"> <li>- rotatable controller</li> </ul>	 <p><b>CPM controller</b> with touchscreen display</p>  <p><b>CP 10 RA</b> with mechanical knob</p>